

cilindro zincato serpentine

peter zumthor 2011



apparecchio di illuminazione a sospensione per interni IP20. realizzato con un cilindro esterno diametro Ø180mm h.300mm in acciaio zincato a caldo e un cilindro interno verniciato a polvere, con cavo di sospensione 3000mm in acciaio e cavo elettrico 3x0,75mm² inclusi.

cablato con sorgente elettronica 3000K Ra98 22,3W 2140lm.

alimentatore 220-240V 50-60Hz incluso. rosone di alimentazione escluso.

ottiche: 28° 42° 54°

accessori: ottiche intercambiabili 18° 28° 42° 54°

finiture: esterno acciaio zincato a caldo e interno nero55.

IP20 rated suspension light fitting for indoor use.

made of a hot galvanized steel external cylinder diameter Ø180mm h.300mm and a powder coated internal cylinder, with 3000mm steel suspension cable and 3x0,75 mm² electric cable included.

wired with 3000K Ra98 22.3W 2140lm led source.


220-240V 50-60Hz power supply included. ceiling rose excluded.

optics: 28° 42° 54°

accessories: 18° 28° 42° 54°

finishes: hot galvanized steel on the outside and nero55 on the inside.



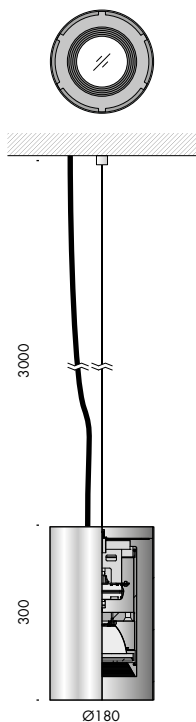


cilindro zincato serpentine 240V 50-60Hz

f8.039.21	acciaio zincato a caldo hot galvanized steel	3000K 28°	3,7
f8.039.22	acciaio zincato a caldo hot galvanized steel	3000K 42°	3,7
f8.039.23	acciaio zincato a caldo hot galvanized steel	3000K 54°	3,7


Ra	R9	ies tm-30		sdcm	mA	V _i (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	31,8	2140	22,3	96	A+
xm001	les19	Ta25 °C		vita media · average life			70000 h	L80	B10	

rosoni di alimentazione. ceiling roses.





f9.039.91	soffitto · ceiling	0,4
------------------	--------------------	-----




f9.039.92	scomparsa totale · fully concealed	0,4
------------------	------------------------------------	-----




sostituzione ottica
optic replacement

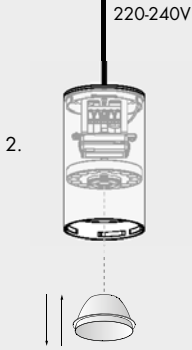

ottiche. optics.	CE	
Vb9.585.50	18°	0,1
Vb9.585.51	28°	0,1
Vb9.585.52	42°	0,1
Vb9.585.53	54°	0,1

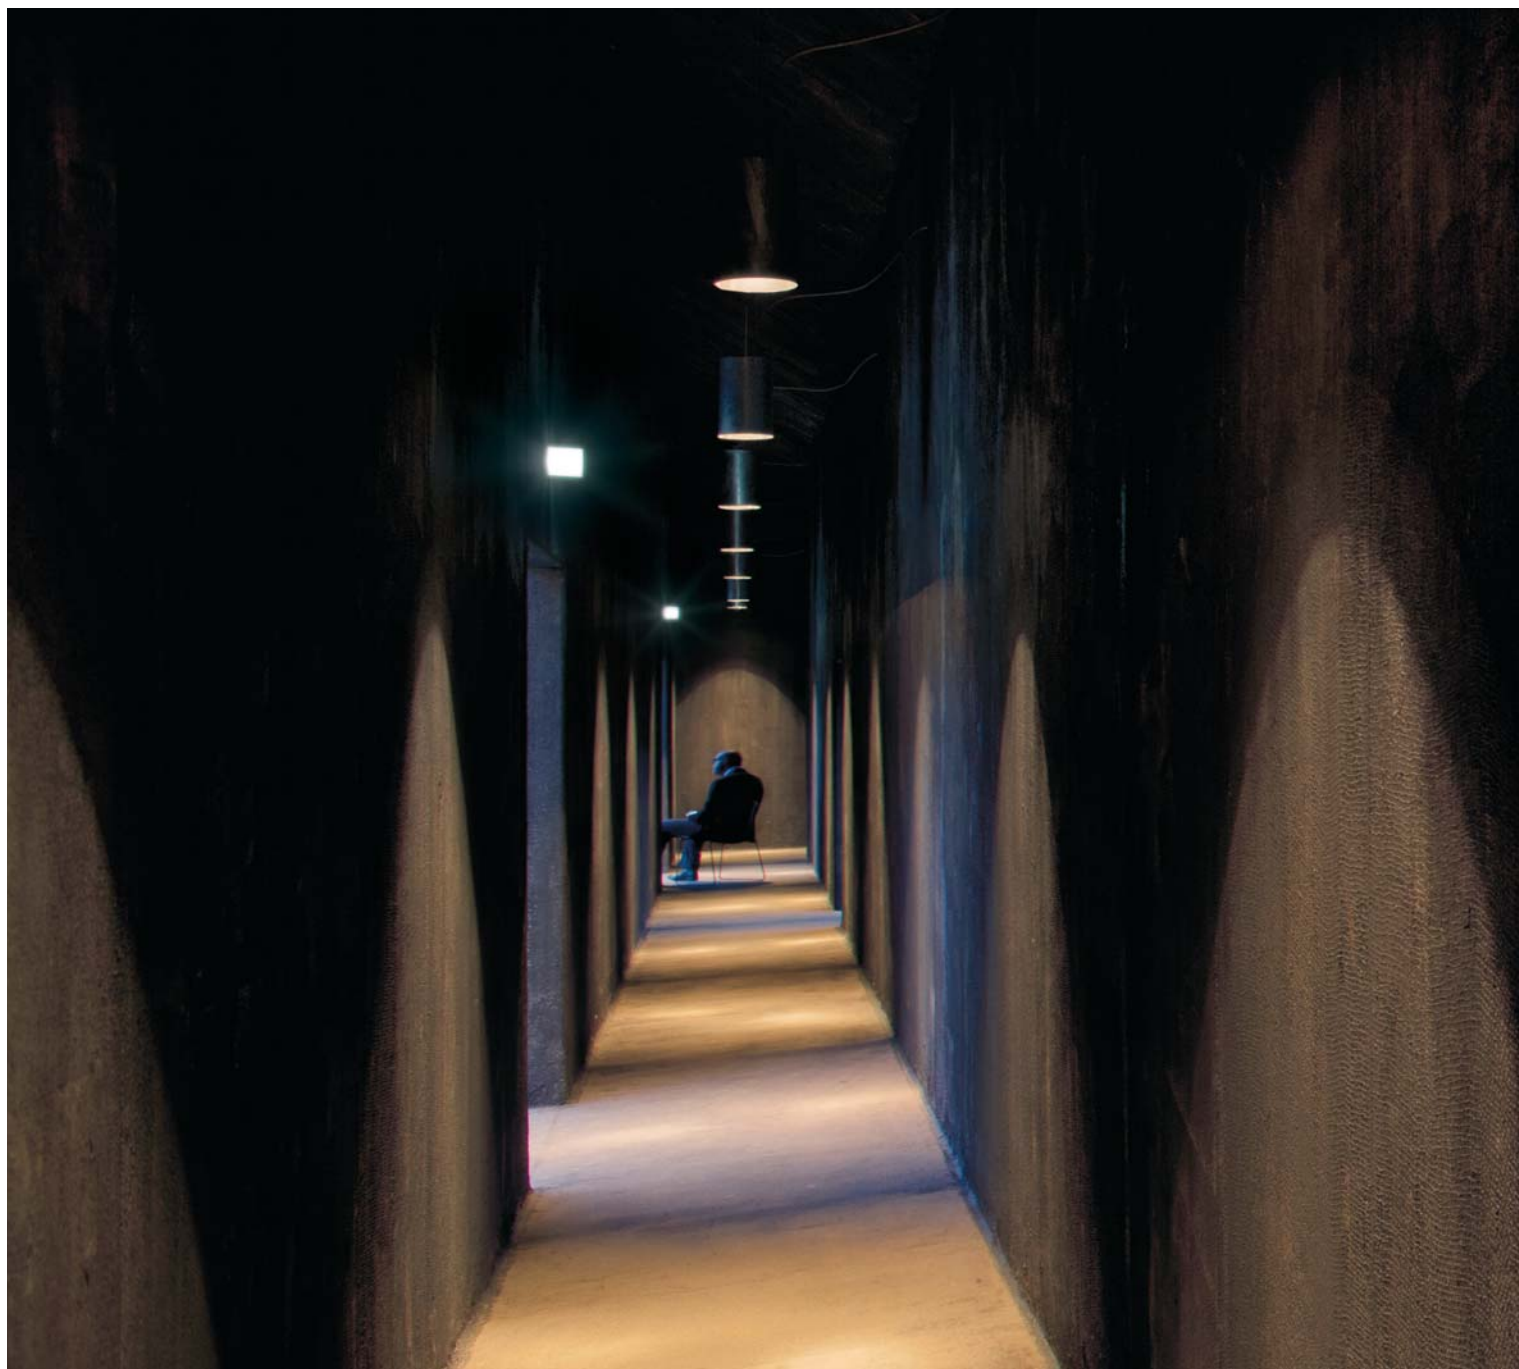

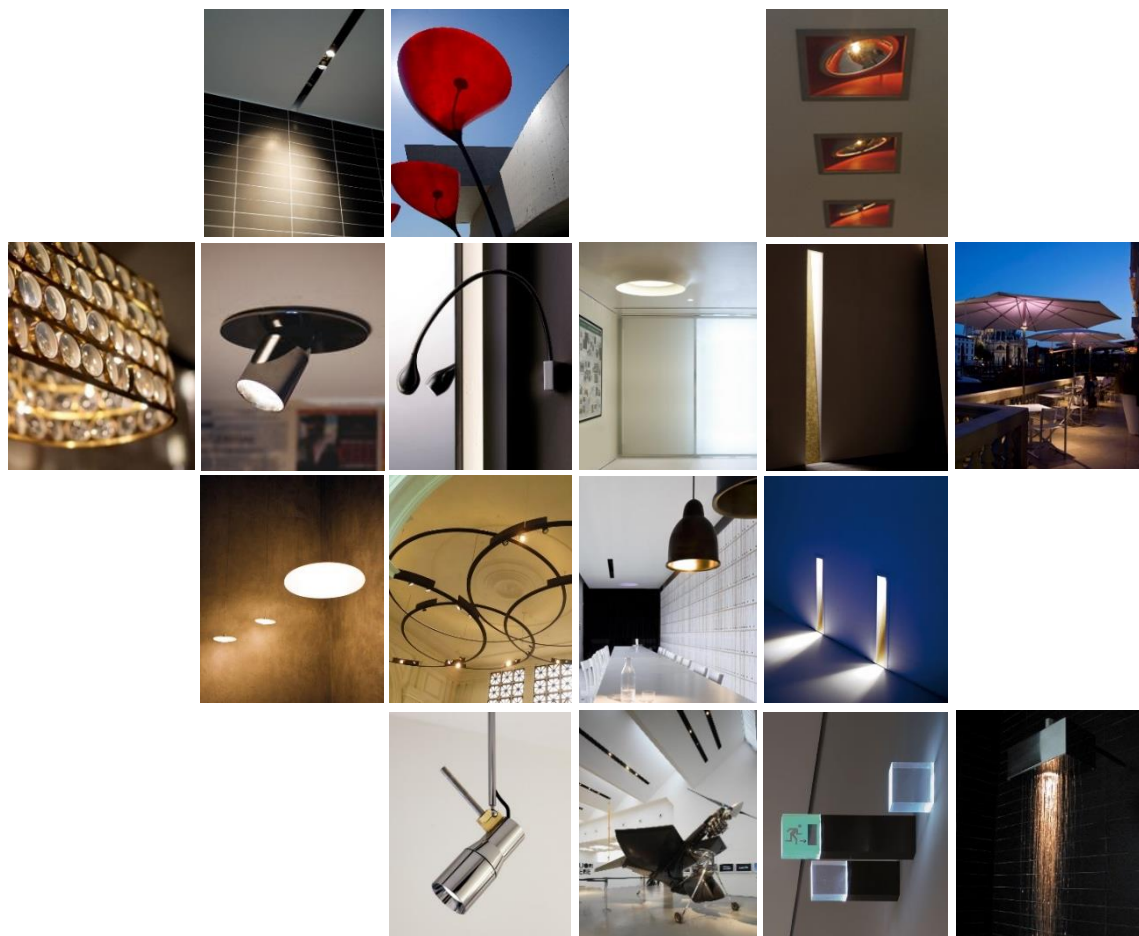

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

