



*apparecchio di illuminazione da incasso o a scomparsa totale per interni IP20, realizzato in alluminio ossidato e verniciato a polvere.
composto da faretto con cassaforma ad incasso a soffitto diametro Ø155mm che può essere installata su spessori da 1mm a 35mm mediante un sistema di alette regolabili o con cassaforma a scomparsa totale diametro Ø130mm.*

modelli:

m13 fisso diametro Ø123mm h.148mm,

m13 orientabile di 360° sull'asse verticale e di 15° sull'asse orizzontale, con faretto diametro Ø123 h.148mm,

m13 wallwasher diametro Ø123mm h.156mm.

cablato con sorgente elettronica 2700K, 3000K o 3000Vb K (progettato per il settore alta moda) Ra98 fino a 34W 3000lm.

ottiche: 19° 28° 42° 54° o wallwasher.

alimentatore in corrente costante escluso, da installare remoto.

accessori: ottiche intercambiabili, frangiluce a nido d'ape, filtro albarino, lente ellittica, vetro sabbiato.

finiture: my bianco o nero55, cassaforma ad incasso my bianco, nero55 o bruno, cassaforma a scomparsa totale nero55.

IP20 rated recessed light fitting for indoor use, made of powder coated oxidized aluminium. consisting spotlight with recessed ceiling housing diameter Ø155mm which can be installed on surfaces from 1mm up to 35mm by means of a system of adjustable tabs.

versions:

m13 fisso with diameter Ø123mm h.148mm spotlight,

m13 orientabile with diameter Ø123mm h.148mm spotlight adjustable by 360° on the vertical axis and by 15° on the horizontal axis,

m13 incasso wallwasher with diameter Ø123mm h.156mm spotlight.

wired with 2700K, 3000K or 3000Vb K (designed for high fashion industry) Ra98 led source up to 34W 3000lm.


optics: 19° 28° 42° 54° or wallwasher.

constant current power supply not included, to be installed remotely.


accessories: interchangeable optics, honeycomb louvre, albarino filter, elliptical lens, frosted glass.

finishes: spotlights my bianco or nero55, recessed housing my bianco, nero55 or brown, fully concealed housing nero55.
















m13 cassaforma incasso					
f9.025.52	my bianco				0,4
f9.025.51	nero55				0,4
f9.025.53	bruno · brown				0,4



m13 cassaforma scomparsa totale					
f9.025.50	nero55				0,3



gradi di apertura fascio luminoso
beam's angle degrees



148


Ø123

m13 fisso					IP20		CE	
Vb6.025.11.27	my bianco	2700K	19°	0,7				
Vb6.025.01.27	nero55	2700K	19°	0,7				
Vb6.025.12.27	my bianco	2700K	28°	0,7				
Vb6.025.02.27	nero55	2700K	28°	0,7				
Vb6.025.13.27	my bianco	2700K	42°	0,7				
Vb6.025.03.27	nero55	2700K	42°	0,7				
Vb6.025.14.27	my bianco	2700K	54°	0,7				
Vb6.025.04.27	nero55	2700K	54°	0,7				

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm000	les19  Ta25 °C			vita media · average life		70000 h		L80 B10		

Vb6.025.11.30	my bianco	3000K	19°	0,7				
Vb6.025.01.30	nero55	3000K	19°	0,7				
Vb6.025.12.30	my bianco	3000K	28°	0,7				
Vb6.025.02.30	nero55	3000K	28°	0,7				
Vb6.025.13.30	my bianco	3000K	42°	0,7				
Vb6.025.03.30	nero55	3000K	42°	0,7				
Vb6.025.14.30	my bianco	3000K	54°	0,7				
Vb6.025.04.30	nero55	3000K	54°	0,7				


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm001	les19 			Ta25 °C		vita media · average life		70000 h	L80 B10	



Vb6.025.11.30v	my bianco	3000VbK	19°	0,7
Vb6.025.01.30v	nero55	3000VbK	19°	0,7
Vb6.025.12.30v	my bianco	3000VbK	28°	0,7
Vb6.025.02.30v	nero55	3000VbK	28°	0,7
Vb6.025.13.30v	my bianco	3000VbK	42°	0,7
Vb6.025.03.30v	nero55	3000VbK	42°	0,7
Vb6.025.14.30v	my bianco	3000VbK	54°	0,7
Vb6.025.04.30v	nero55	3000VbK	54°	0,7





Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm007	les19 		Ta25 °C		vita media · average life		70000 h	L80 B10		



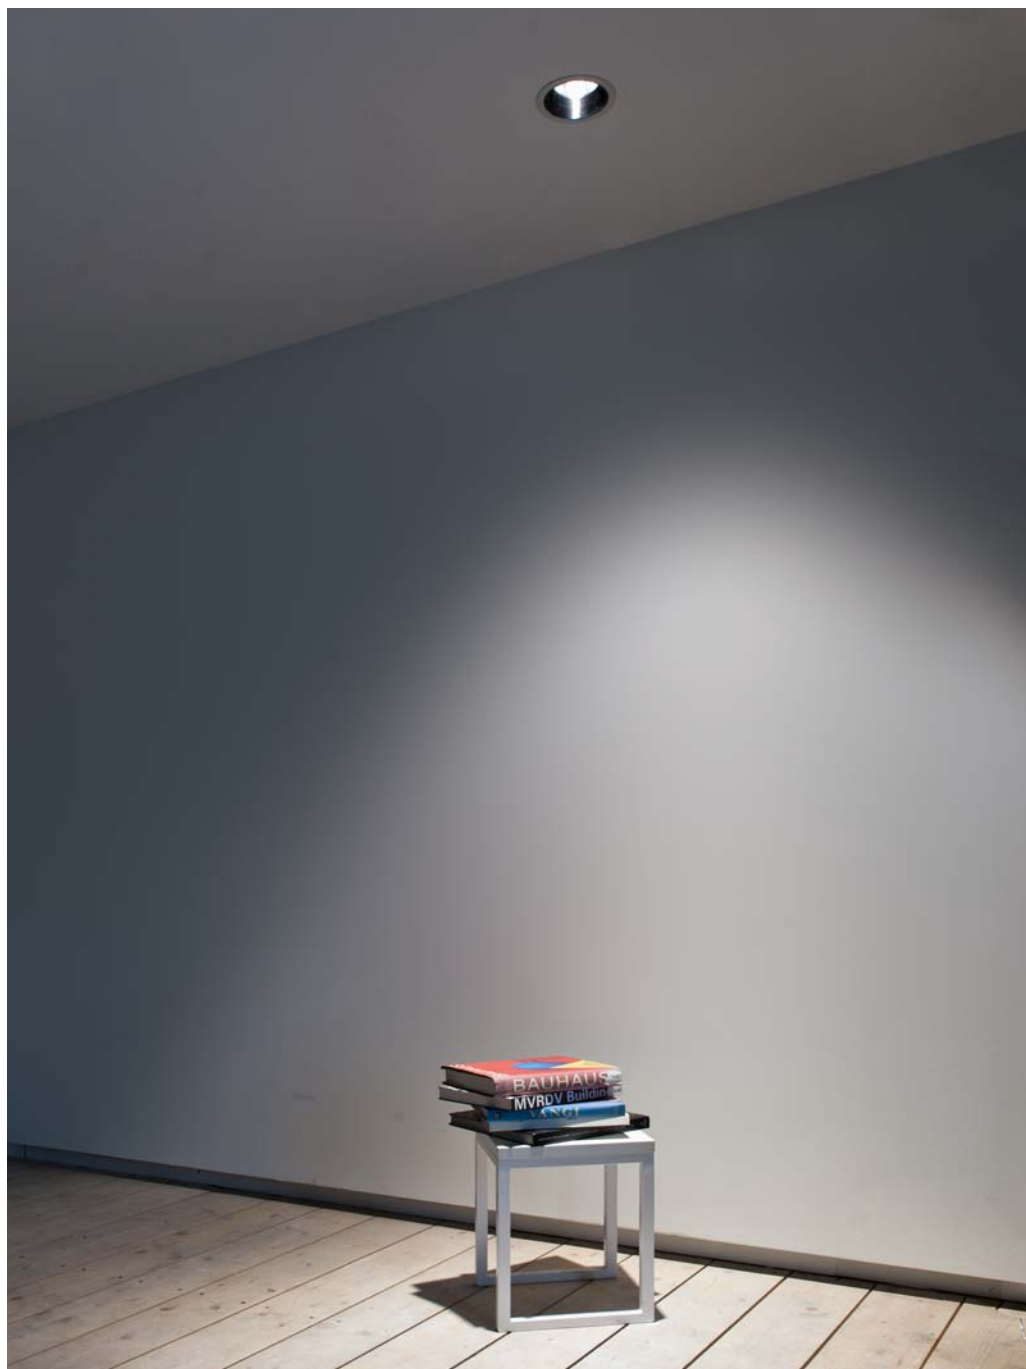




gradi di apertura fascio luminoso
beam's angle degrees



gradi di rotazione
rotation degrees



m13 orientabile					IP20		☆	CE	
Vb6.025.41.27	my bianco	2700K	19°	1					
Vb6.025.31.27	nero55	2700K	19°	1					
Vb6.025.42.27	my bianco	2700K	28°	1					
Vb6.025.32.27	nero55	2700K	28°	1					
Vb6.025.43.27	my bianco	2700K	42°	1					
Vb6.025.33.27	nero55	2700K	42°	1					
Vb6.025.44.27	my bianco	2700K	54°	1					
Vb6.025.34.27	nero55	2700K	54°	1					

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm000	les19  Ta25 °C			vita media · average life		70000 h		L80 B10		

Vb6.025.41.30	my bianco	3000K	19°	1					
Vb6.025.31.30	nero55	3000K	19°	1					
Vb6.025.42.30	my bianco	3000K	28°	1					
Vb6.025.32.30	nero55	3000K	28°	1					
Vb6.025.43.30	my bianco	3000K	42°	1					
Vb6.025.33.30	nero55	3000K	42°	1					
Vb6.025.44.30	my bianco	3000K	54°	1					
Vb6.025.34.30	nero55	3000K	54°	1					

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm001	les19  Ta25 °C			vita media · average life		70000 h		L80 B10		




Ø123

148

Vb6.025.41.30v	my bianco	3000Vb K	19°	1
Vb6.025.31.30v	nero55	3000Vb K	19°	1
Vb6.025.42.30v	my bianco	3000Vb K	28°	1
Vb6.025.32.30v	nero55	3000Vb K	28°	1
Vb6.025.43.30v	my bianco	3000Vb K	42°	1
Vb6.025.33.30v	nero55	3000Vb K	42°	1
Vb6.025.44.30v	my bianco	3000Vb K	54°	1
Vb6.025.34.30v	nero55	3000Vb K	54°	1

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm007	les19	Ta25 °C		vita media · average life		70000 h	L80 B10			





ottiche m13. optics.			☆	CE	i
Vb9.025.61	19°				0,1
Vb9.025.62	28°				0,1
Vb9.025.63	42°				0,1
Vb9.025.64	54°				0,1



accessori. accessories.			☆	CE	i
Vb9.025.66	frangiluce nido d'ape · honeycomb louvre				0,01
Vb9.025.67	filtro albarino · albarino filter				0,08
Vb9.025.68	lente ellittica · elliptical lens				0,1
Vb9.025.69	vetro sabbiato · sanded glass				0,08



Vb6.025.71.27/30/30v
Vb6.025.61.27/30/30v

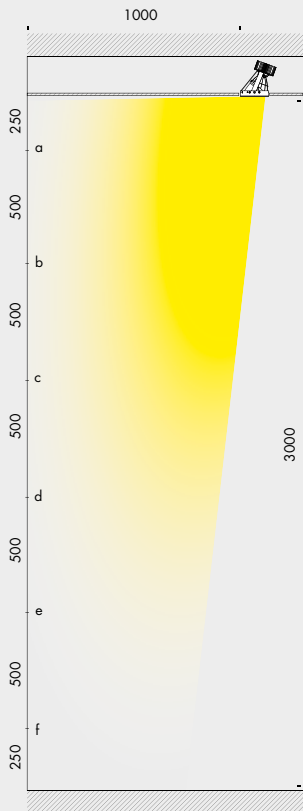

	valori in lux lux values
a	42
b	134
c	171
d	127
e	81
f	60

m13 wallwasher    **IP20**    

Vb6.025.71.27 my bianco 2700K 0,9
Vb6.025.61.27 nero55 2700K 0,9

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm000	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		


Vb6.025.71.30 my bianco 3000K 0,9
Vb6.025.61.30 nero55 3000K 0,9

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm001	les19 			Ta25 °C		vita media · average life		70000 h		L80 B10

Vb6.025.71.30v my bianco 3000Vb K 0,9
Vb6.025.61.30v nero55 3000Vb K 0,9

Ra	R9	ies tm-30		sdc	mA	V _f [min]	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	30,9	1240	10,8	115	A++
					500	31,2	1580	15,6	101	A+
					700	31,8	2140	22,3	96	A+
					1050	32,5	3000	34	88,2	A+
xm007	les19 			Ta25 °C		vita media · average life		70000 h		L80 B10



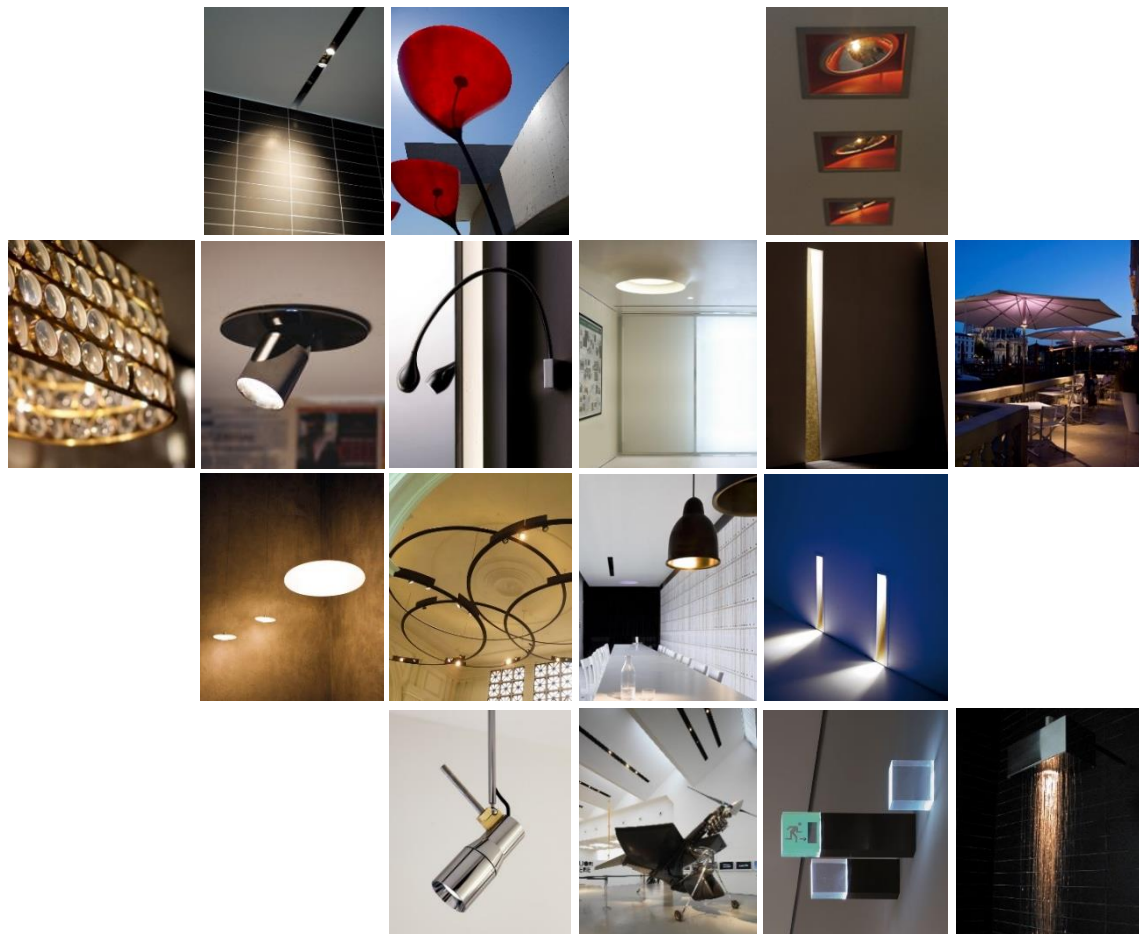

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

