





apparecchio di illuminazione a parete per interni IP20. realizzato in estruso di alluminio ossidato di sezione 48x30mm. modelli:
c2 rotante 1440mm 36,4W 3495lm.
c2 rotante 1740mm 44,2W 4244lm.
c2 rotante 2040mm 52W 4992lm. cablato con sorgente elettronica lineare con limitatore di corrente integrato 3000K Ra95 26W/m. alimentatore 120-240V 50-60Hz incluso.
componenti: supporto terminale per alimentazione, supporto terminale cieco, supporto centrale per alimentazione.
finiture: argento opaco.

IP20 rated wall light fitting for indoor use. made of oxidised extruded aluminium having a 48x30mm section.
versions:
c2 rotante 1440mm 36.4W 3495lm.
c2 rotante 1740mm 44.2W 4244lm.
c2 rotante 2040mm 52W 4992lm. wired with a linear led source and an integrated 3000K Ra95 26W/m current limiter. 120-240V 50-60Hz power supply included.
elements: terminal support for power supply, blind terminal support, central support for power supply.
finishes: matt silver.

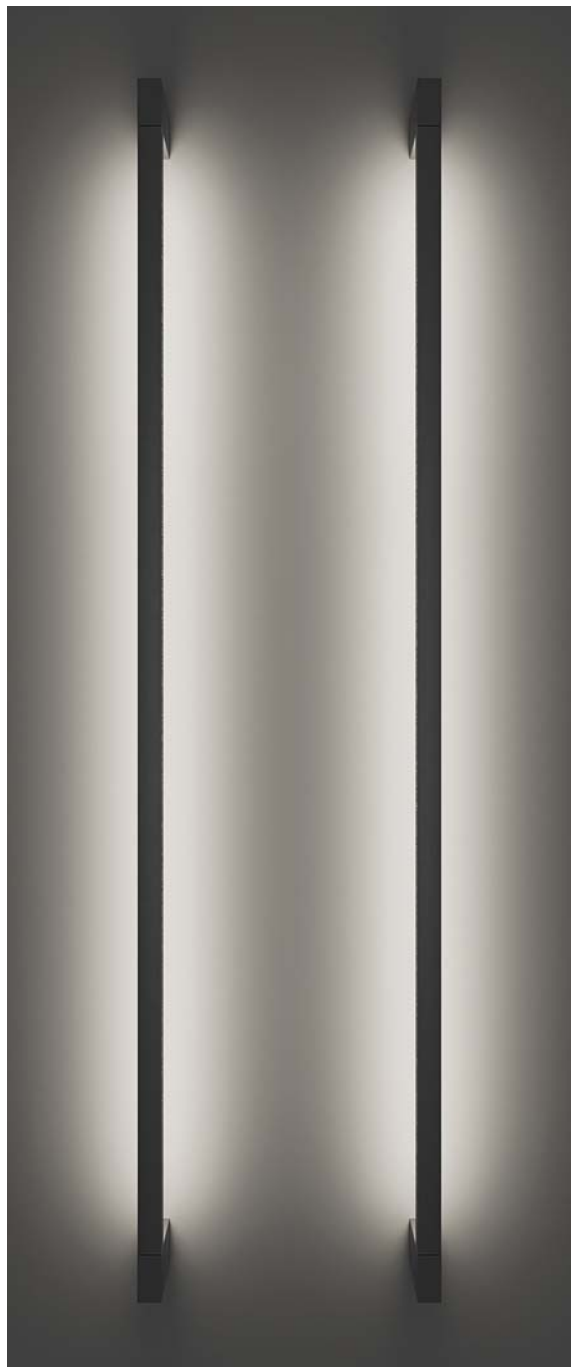

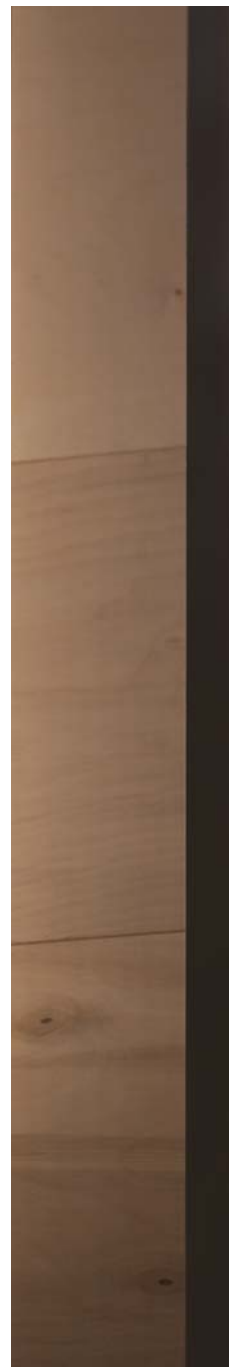





c2 rotante 120-240V 50-60Hz IP20

- Vb6.133.01** argento opaco · silver matt 3000K 36,4W 1440mm 1,65
- Vb6.133.03** argento opaco · silver matt 3000K 44,2W 1740mm 1,98
- Vb6.133.05** argento opaco · silver matt 3000K 52W 2040mm 2,45

Ra	R9	ies tm-30		sdc	V _f	lm/m	W/m	lm/W		
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	A+	
V3001	11	Ta25 °C		vita media · average life		50000 h	L80	B10		


componenti. components.

- Vb9.133.91** supporto terminale per alimentazione
electrified end support 0,5
- Vb9.133.93** supporto terminale cieco · blind end support 0,5
- Vb9.133.95** supporto centrale per alimentazione
electrified central support 0,6

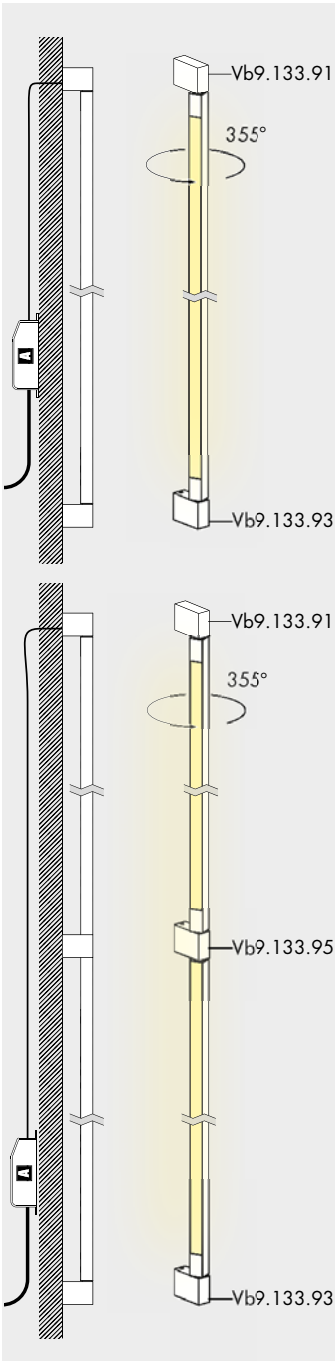






c2 rotante 1440mm

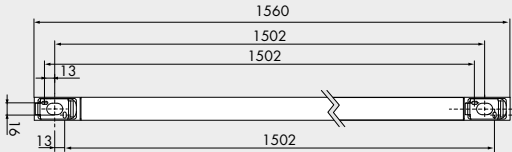


c2 rotante 1749mm

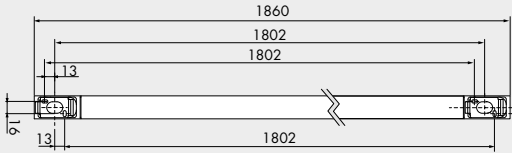

c2 rotante 2040mm

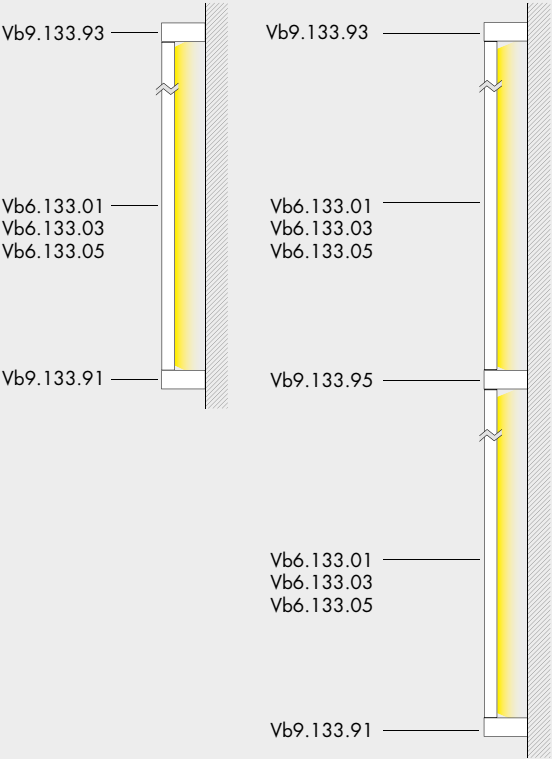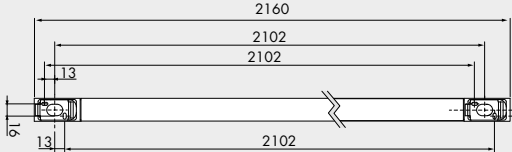

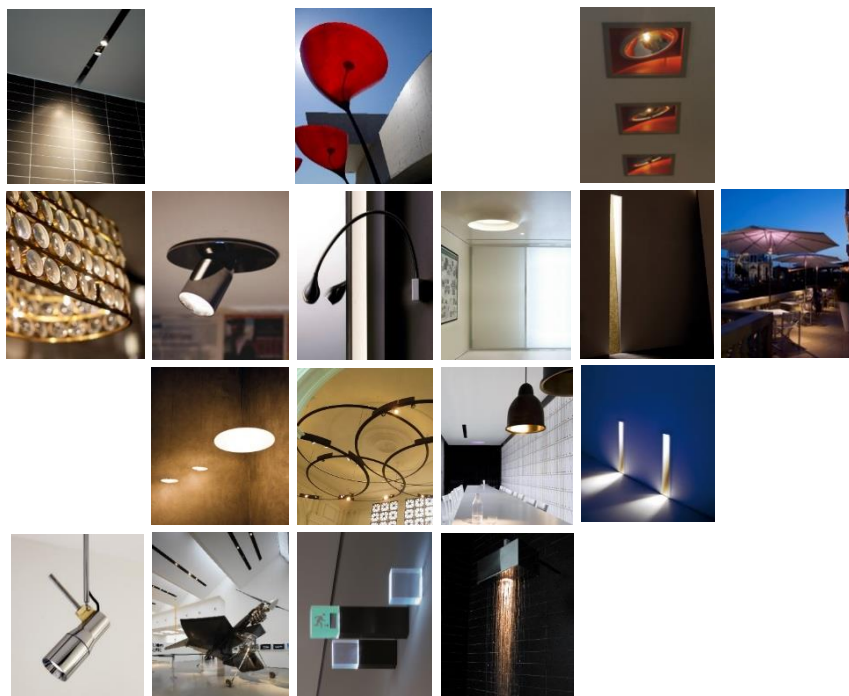

**Distributor for Viabizzuno
Architectural Lighting Solutions**

www.cirruslighting.co.uk

sales@cirruslighting.co.uk

Tel 0207 193 2175

Fax 0207 193 3175

