



apparecchio di illuminazione per esterni IP65.

realizzato con tubo in acciaio trafilato diametro alla base Ø153mm verniciato a polvere.

il palo di dimensioni

1125x300mm h.5200mm fuori terra è dotato di morsettiera a scomparsa ispezionabile e si sviluppa in un unico elemento sagomato alla sommità.

cablato con sorgente elettronica 3000K 36W 4338lm, con vetro trasparente e ottica 35° oppure con vetro trasparente e ottica ellittica 23°x80°.

alimentatore 240V 50-60Hz, integrato.

finiture: bruno antico, nero notte, scurodivals e grigio argento.


IP65 rated light fitting for outdoor use.

made of powder coated drawn diameter at the base Ø153mm steel tube. the pole sized 1125x300mm and h.5200mm above ground is equipped with a fully concealed accessible terminal block and is made of a single element with a shaped end.

wired with 3000K 36W 4338lm led source, with transparent glass and 35° optics or with transparent glass and 23°x80° elliptical optics. 240V 50-60Hz power supply included.

finishes: antique brown, night black, scurodivals and silver grey.



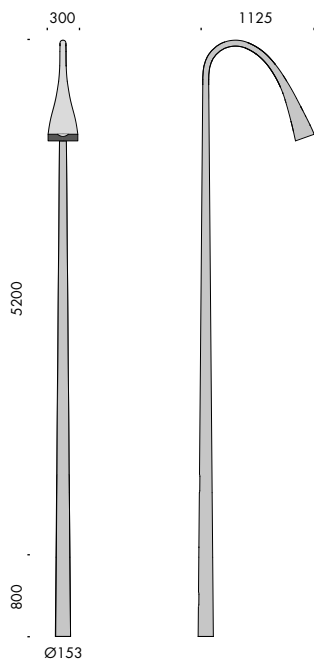



sentiero di vals



CE



f4.183.01	bruno antico · antique brown	70
f4.183.03	nero notte · night black	70
f4.183.05	scurodivals	70
f4.183.07	grigio argento · silver grey	70





kit	240V 50/60Hz	A	K	IP65	△	CE	i
Vb9.183.81	vetro trasparente trasparent glass	3000K	3x12W	35°	4,4		
Vb9.183.75	vetro trasparente with clear glass	3000K	3x12W	23x80°	4,4		

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	51,6	4338	36	120	A++
ce021-3	Ta25 °C		vita media · average life		50000 h	L80 B10			





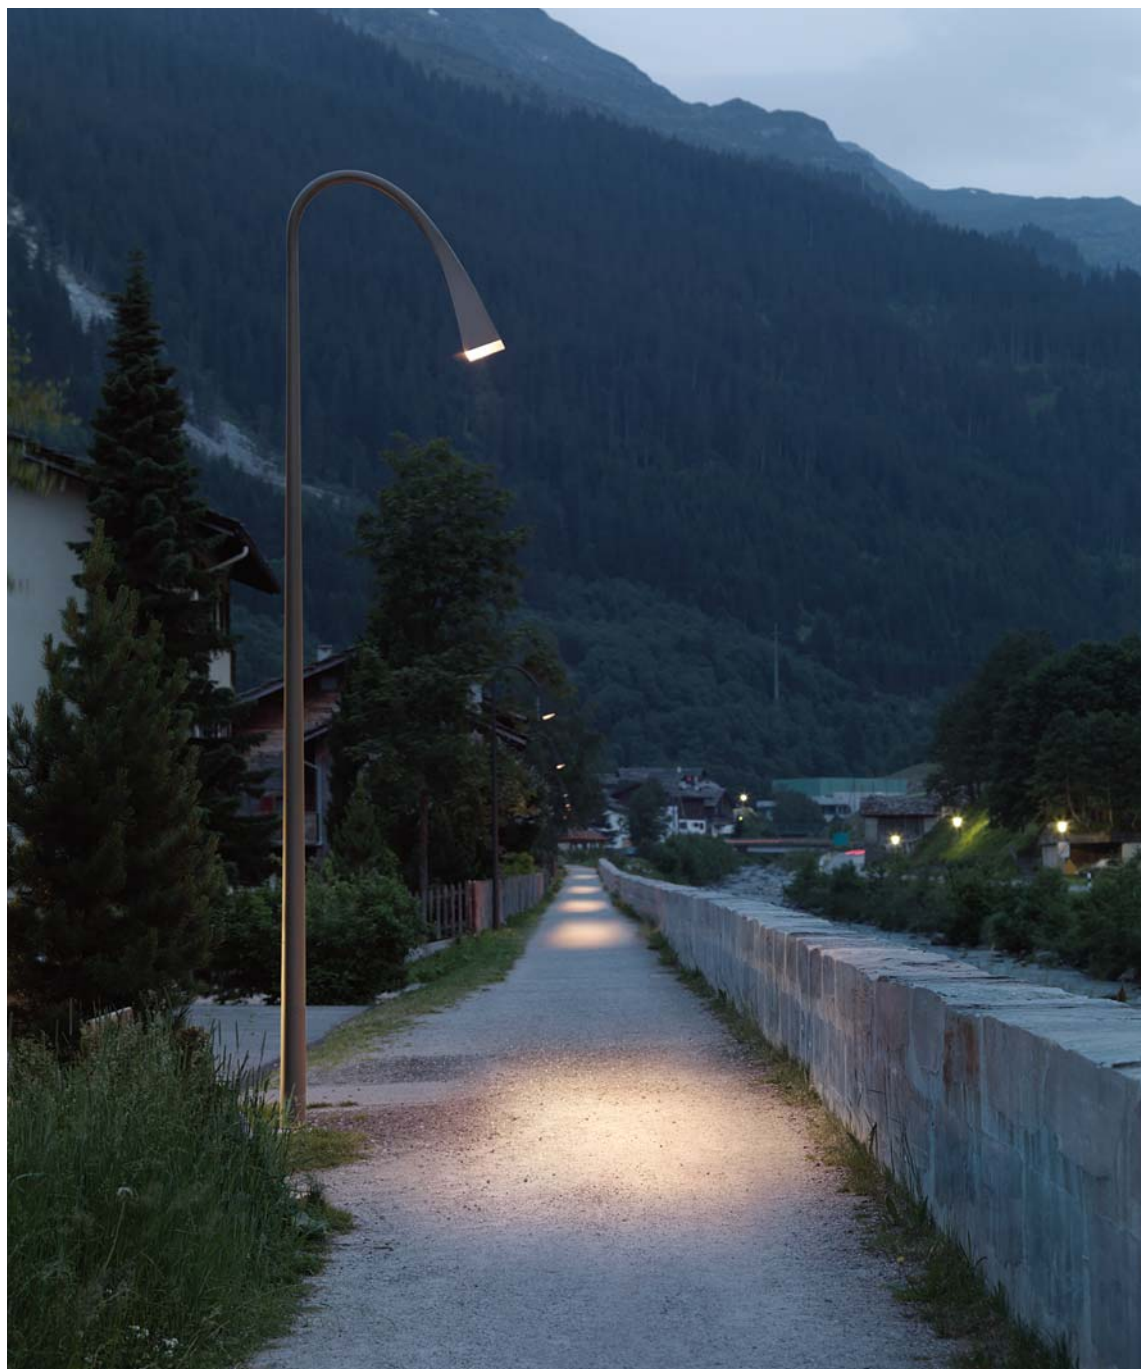

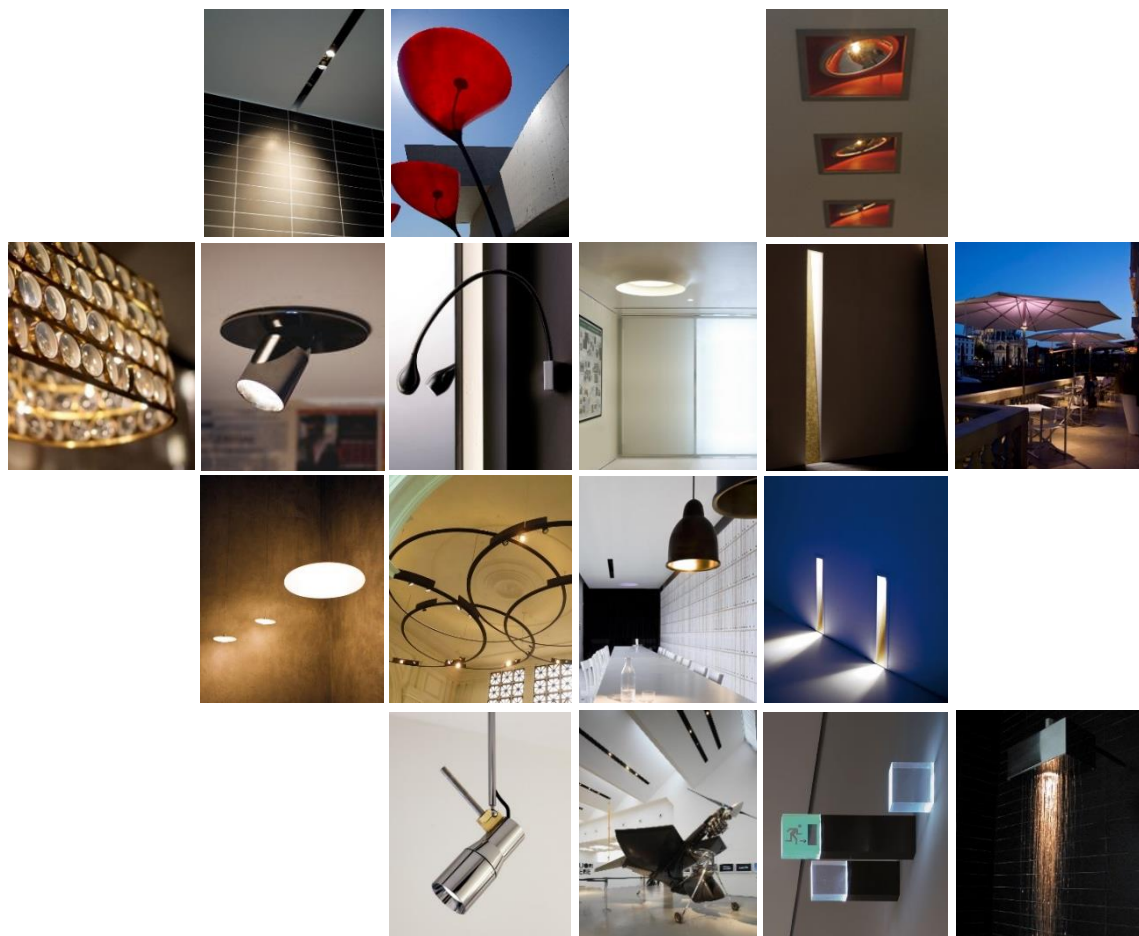

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

