

# codega tavolo


alessandro andreucci 2009



**apparecchio di illuminazione portatile per interni ed esterni IP44 alimentato a batteria.**  
**base in legno palissandro o alluminio ossidato e verniciato a polvere con maniglia in**  
**alluminio ossidato e diffusore in policarbonato opalino, con funzione di lampada di**  
**emergenza se alimentata da tensione di rete.**  
**dimensioni: 320x135x135mm.**  
**cablato con sorgente elettronica 2700K Ra95 4,5W 337lm per luce diffusa.**  
**autonomia batteria 6 ore, tempo di ricarica 14 ore, caricabatterie 240V 50-60Hz incluso.**  
**finiture: base in legno di palissandro o base alluminio nero55.**

IP44 rated portable and rechargeable light fitting for indoor and outdoor use.  
rosewood or powder coated oxidised aluminium base with an oxidised aluminium handle  
and an opal polycarbonate diffuser. it can be used as an emergency lamp if powered from  
the mains.  
sizes: 320x135x135mm.  
wired with 2700K Ra95 4.5W 337lm electronic source for diffused light.  
battery life: 6 hours, recharge time 14 hours, 240V 50-60Hz battery charger included.  
finishes: rosewood base or aluminium nero55 base.






| codega tavolo     |                                  | 240V 50-60Hz | AS | IP44 | CE |  |
|-------------------|----------------------------------|--------------|----|------|----|--|
| <b>Vb2.547.01</b> | base palissandro · rosewood base | 2700K        | 2  |      |    |  |
| <b>Vb2.547.03</b> | base alluminio · aluminium base  | nero55 2700K | 2  |      |    |  |

| Ra    | ies tm-30 |         | sdcm   | mA                        | V <sub>f</sub> (min) | lm      | W   | lm/W |           |
|-------|-----------|---------|--------|---------------------------|----------------------|---------|-----|------|-----------|
| 95    | Rf 92     | Rg 100  | step 2 | 500                       | 9,2                  | 337     | 4,5 | 73   | <b>A+</b> |
| cd020 | les6      | Ta25 °C |        | vita media · average life |                      | 50000 h | L80 | B10  |           |





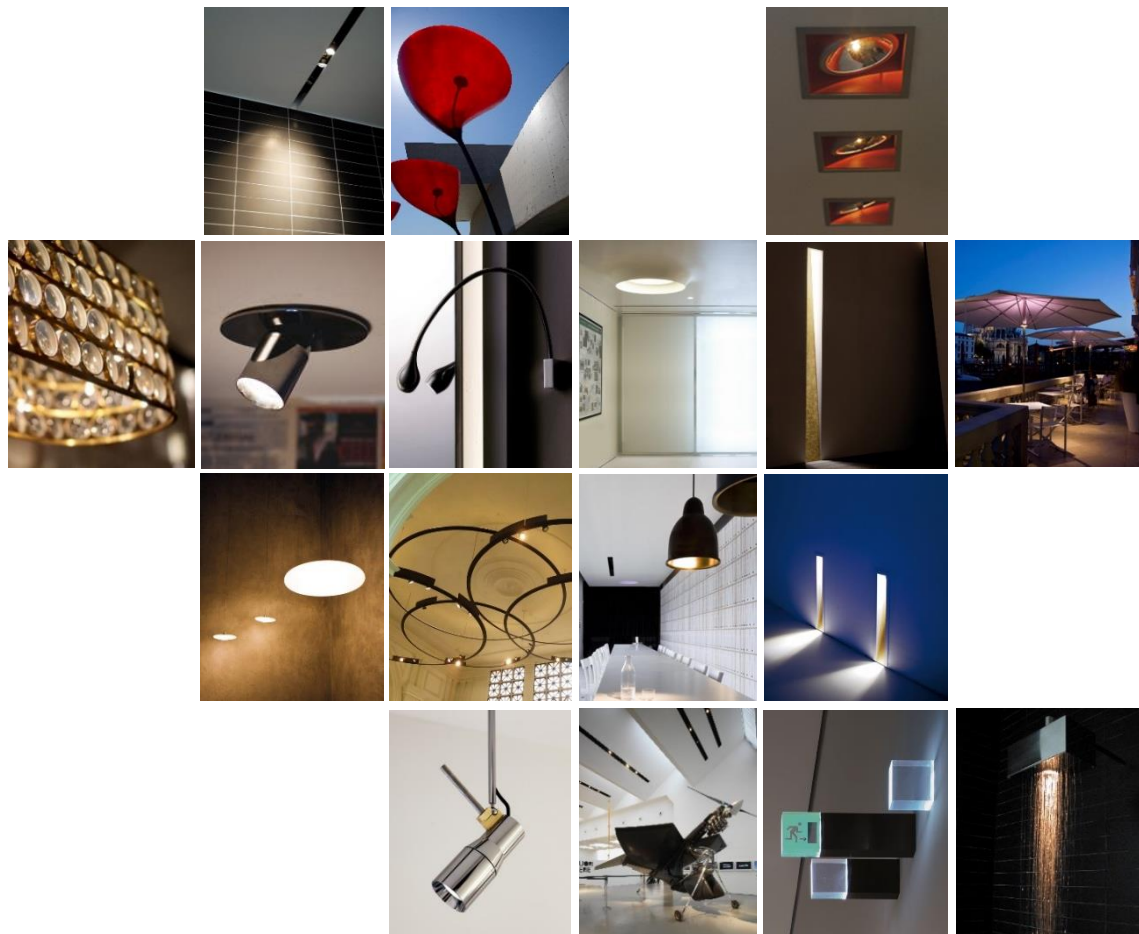

Contact Us



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

